

Product Specification Sheet


4Way Power Splitter

SUNTEL

Model : PS-4WAY-NF

Feature

- Wideband Performance 698~ 2700 MHz
- Low Insertion Loss
- Low VSWR
- Low Passive Inter Modulation Products
- Indoor / Outdoor Applications
- N Female Connector

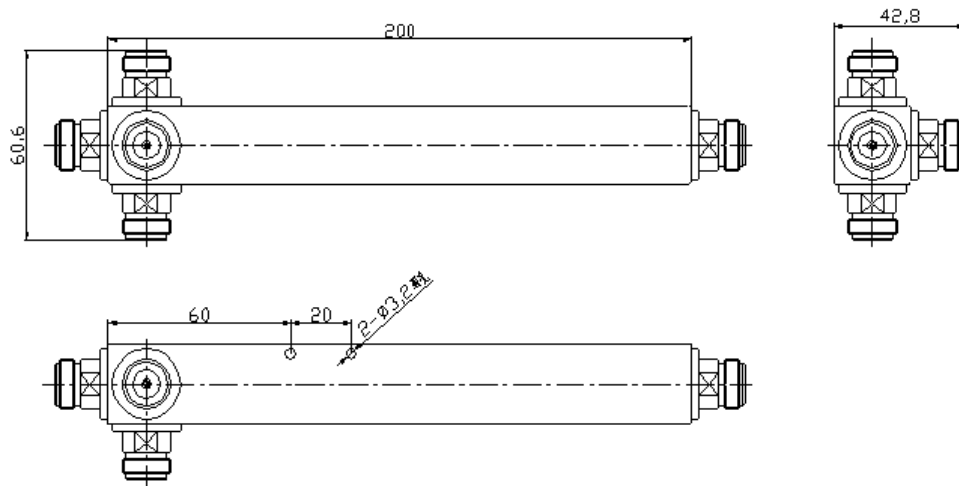

Specifications

Frequency Range)	698~ 2700
VSWR	≤ 1.3
Impedance (Ω)	50
Return Loss (dB)	≤ -17.7
Insertion Loss	≤ 0.2
Split Loss (dB)	4.8
PIMD (43dBm / 2 tone) (dBc)	≤ -150
Input Power (Max) (W)	300
Connectors	N - female
DC-path	All ports
Operating Temperature (°C)	-30 ~ +75°C / 0 ~ 95 %
Applications	IP65
Weight (g)	600
Dimensions (H x W x L)(mm)	200x25x25